

AN OPENING WILL EXIST IN EACH WALL TO PROVIDE FOR VENTILATION. PRIOR TO POURING/PUMPING CEMENT, THE OPENING WILL BE CLOSED.

*3000 P.S.I. CEMENT WILL BE PUMPED IN THRU A HOLE IN THE CONCRETE LINING FROM THE SURFACE

*6" SOLID BLOCK WALLS


*MIN. # 4 REBAR

*MIN. 6"X6" I-BEAM BOLTED TO BOTTOM

*MIN. 2"X6" WOOD BRACING

SLOPE CROSS SECTION FRONT VIEW

SLOPE CROSS SECTION SIDE VIEW

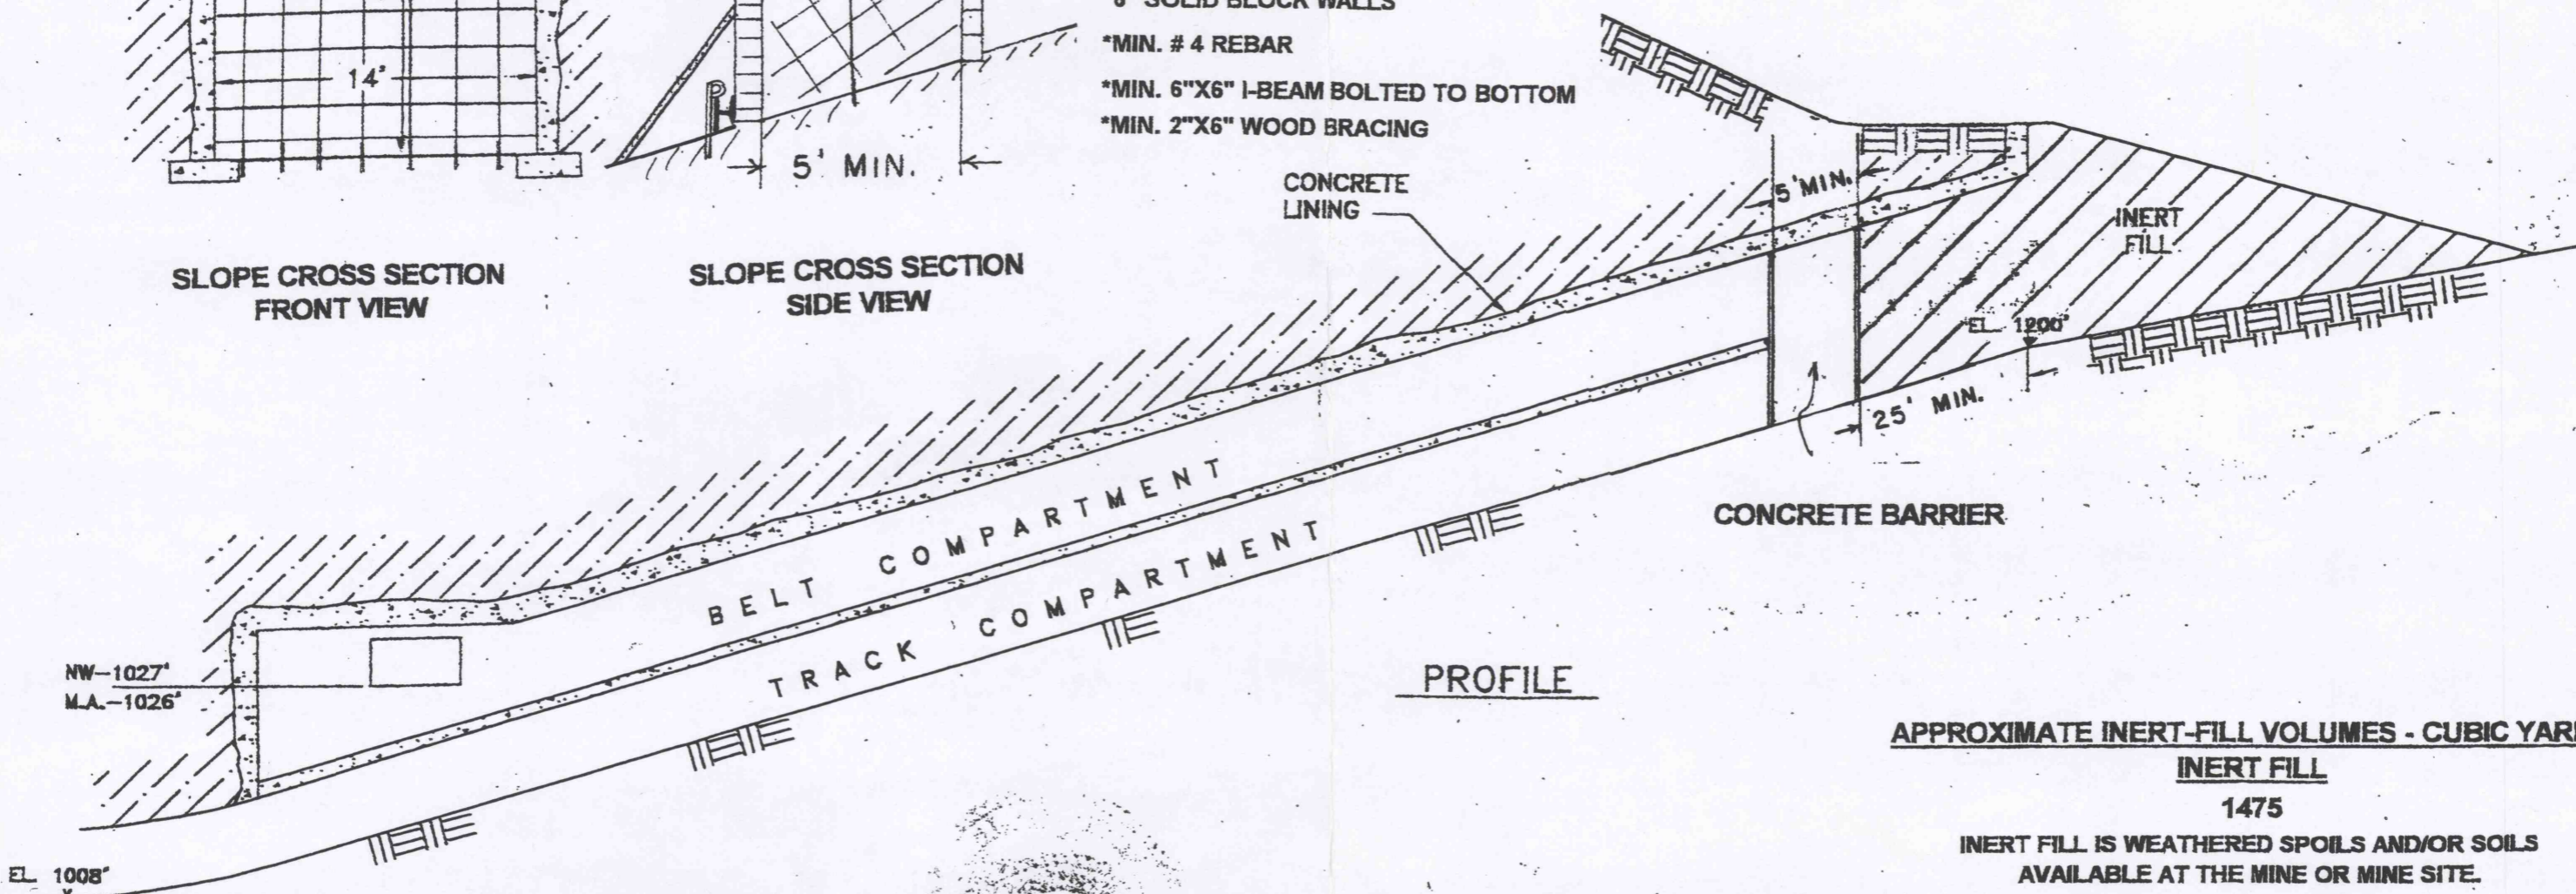

PROFILE

APPROXIMATE INERT-FILL VOLUMES - CUBIC YARDS

INERT FILL
 1475
 INERT FILL IS WEATHERED SPOILS AND/OR SOILS AVAILABLE AT THE MINE OR MINE SITE.

TYPICAL SLOPE SEAL PLAN
 NTS



Thomas A. Nalisnick

6-26-00
 S.S.A.

TANOMA COAL COMPANY, INC.
 TANOMA MINE
 6/22/2000
 APPENDIX IV