



Prepared by the U.S. Army Topographic Command (RMND), Washington, D.C. Compiled in 1955 from United States quadrangles, 1:24,000, 1:50,000, and 1:62,500, 1920-51. Planimetry revised in part from aerial photographs taken 1949-51. Map field checked 1957. Revised by the U.S. Geological Survey 1969.

Area covered by dashed light-blue pattern is subject to controlled inundation.

100,000-foot grids based on Ohio coordinate system, north and south zones and Pennsylvania coordinate system, south zone.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars.

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

RAILROADS

- Single track
- Double or multiple track
- Standard gauge
- Narrow gauge

BOUNDARIES

- International
- State
- County
- Park or reservation

ROADS

- Primary, all-weather, hard surface
- Secondary, all-weather, hard surface
- Light-duty, all-weather, improved surface
- Fair or dry weather, unimproved surface
- Trail
- Interchange

Route markers: Interstate, U.S., State

Landplane airport

- Landing area
- Seaplane anchorage
- Orchard
- Woods-brushwood

Landmark: School; Church; Other

- Spot elevation in feet
- Marsh or swamp
- Intermittent or dry stream
- Powerline

Other symbols:

- Mine
- Fishkill

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Nautical Miles


CONTOUR INTERVAL 100 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17

1965 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 3° (50 MILS) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 5° (50 MILS) WESTERLY FOR THE CENTER OF THE EAST EDGE.

FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

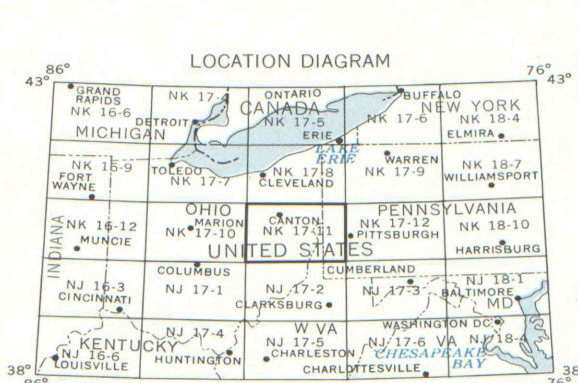

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION: 17T

100,000 M. SQUARE IDENTIFICATION

MR	NR
MQ	NQ

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: LEEDVILLE

SECTION REFERENCE:

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

Estimate tenths from grid line to point.

EXAMPLE: 4430000

SECTION REFERENCE:

If reporting beyond 10" in any direction, prefix Grid Zone Designation, e.g., 17TMB278

IMAPS 11292

CANTON, OHIO; PA.; W. VA.
1957
REVISED 1969