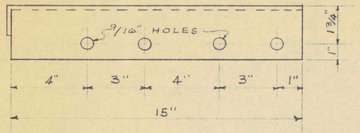

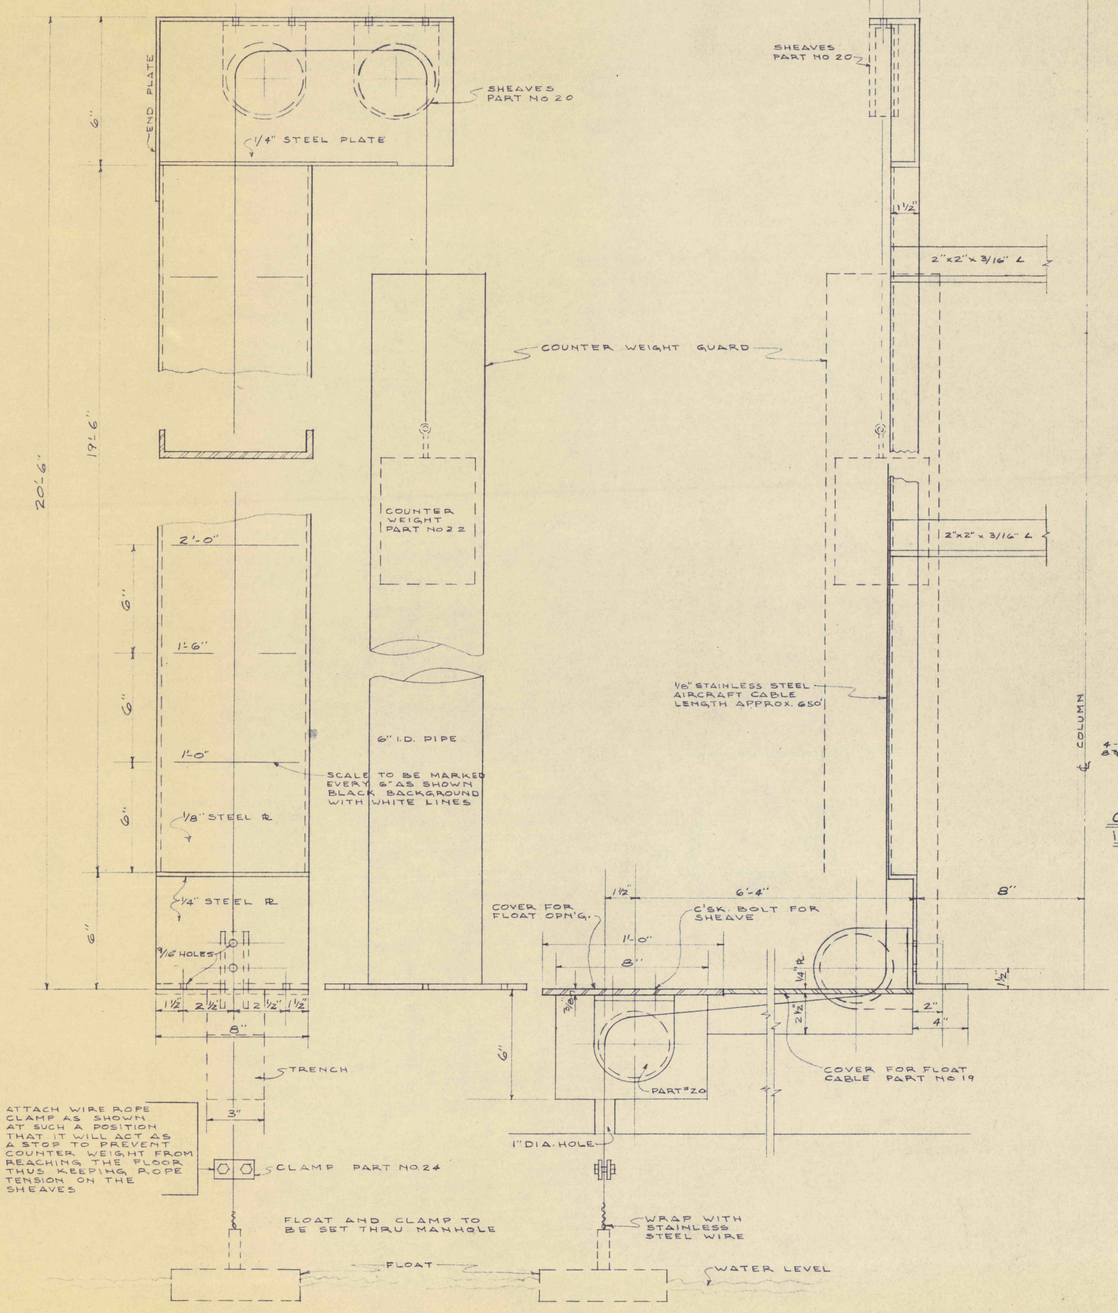

FLOAT SCALE 1 REQ'D

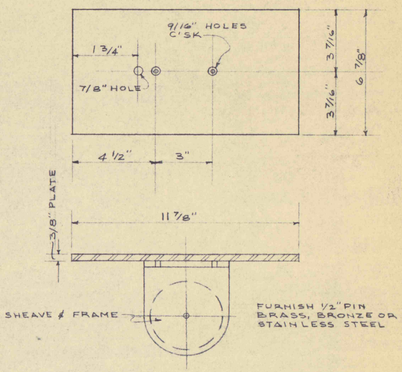

COVER FOR FLOAT OPN'G.
1 REQ'D PART NO 34

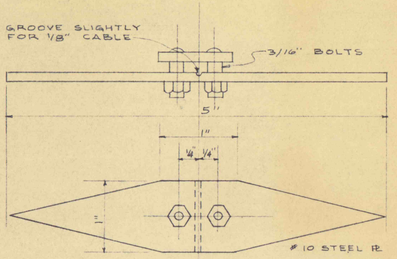

FLOAT SCALE INDICATOR
1 REQ'D PART NO 18

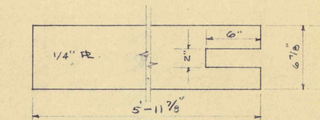

COVER FOR FLOAT CABLE AT FLOOR - PART NO 19
1 REQD.

C'WEIGHT GUARD - PART NO. 21
1 REQ'D

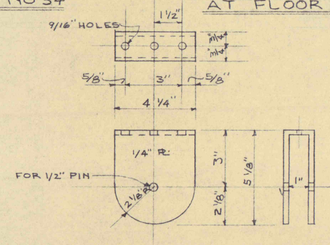

SHEAVE FRAME - PART NO 20
STEEL 4 REQ'D
FURNISH 1/2" PIN

4"x 3/4" x 1/2" STD. SHEAVE
PART NO. 25 FOR 1/8" ROPE
4 REQD. PART NO 20

WEIGHTS FURNISH
1-1/2"; 1-3/4"; 2-1" THICK



FLOAT C'WEIGHT - PART NO. 22
STEEL 1 REQ'D

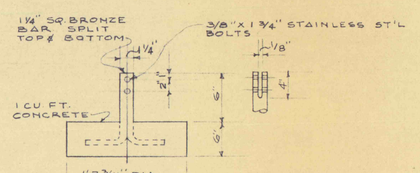

CONCRETE FLOAT PART NO 23
1 REQ'D

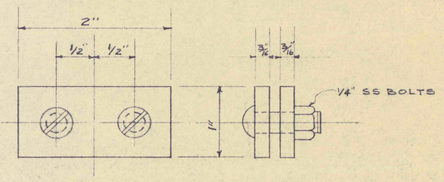

WIRE ROPE CLAMP - PART NO 24
STAINLESS STEEL 1 REQ'D

NOTE: PARTS MARKED "BORROWED FROM PROJ. NO 13" SHALL BE MADE AVAILABLE TO THE CONTRACTOR FROM BUTTONWOOD PUMPING STATION; PROJECT NO. 13 OF THE GLEN ALDEN CORP.

BILL OF MATERIAL

PART NO.	PART NAME	NO. REQ'D	REMARKS
1	BLOCK & TACKEL COMPLETE	1	BORROW FROM PROJ. No 13
2	HEAVY ROPE SLING	4	BORROW FROM PROJ. No 13
3	FLOOR SHEAVE	1	BORROW - PROJ. No 13
4	ELEVATOR	1	BORROW — PROJ No 13
5	OIL TUBE CLAMP	1	BORROW - PROJ No 13
6	SHAFT CLAMP	1	BORROW - PROJ No 13
7	PILLOW BLOCK	4	BORROW - PROJ No 13
8	SAFTEY COVER	1	BORROW - PROJ No 13
9	TOOL BOX	1	BORROW - PROJ No 13
10	LIFTING BEAM	1	BORROW - PROJ No 13
11	PILOT HEAD	1	BORROW - PROJ No 13
12	SWIVEL BLOCK	1	BORROW - PROJ No 13
13	TOP HANGER PIN	2	BORROW - PROJ No 13
14	LIFTING CAP	1	BORROW - PROJ No 13
15	MIDWAY SHEAVE	1	BORROW - PROJ No 13
16	MOTOR LIFT SLING CHAIN	1	BORROW - PROJ No 13
17	FOUR WAY HANGER	1	BORROW — PROJ No 13
18	FLOAT SCALE INDICATOR	1	FURNISHED BY CONTR
19	COVER FOR FLOAT CABLE	1	FURNISHED BY CONT'R
20	4" SHEAVE BLOCK COMPLETE	4	FURN. BY CONT'R.
21	C'WEIGHT GUARD	1	FURN. BY CONT'R.
22	FLOAT COUNTER WEIGHT	1	FURN. BY CONT'R.
23	CONCRETE FLOAT	1	FURN. BY CONT'R.
24	WIRE ROPE CLAMP	1	FURN. BY CONT'R.
25	SUPPORTING PLATE	1	BORROW — PROJ No 13
26	BRIDAL CHAIN ASSY & HOOKS	1	BORROW - PROJ No 13
27	WORK BENCH	1	BORROW - PROJ No 13
28	PLATFORM LADDER	1	BORROW - PROJ No 13
29	LIFTING STRAP FOR PIPE	1	BORROW - PROJ No 13
30	HOIST ANGLES FOR BOWL ASSY	2	BORROW - PROJ No 13
31	1½ TON ELECTRIC HOIST	1	BORROW - PROJ No 13
32	5 TON TRAVELING CRANE	1	FURN. BY CONT'R.
33	7/8" DIA. WIRE ROPE 1150 FT.		BORROW - PROJ No. 13
34	COVER FOR FLOAT OPN'G.	1	FURN. BY CONT'R

COMMONWEALTH OF PENNSYLVANIA — PROFESSIONAL REGISTERED ENGINEER — RAY E. ROUSHEY — No 10478

COMMONWEALTH OF PENNSYLVANIA — PROFESSIONAL REGISTERED ENGINEER — DONALD DENDLER SMITH — No 10614

MISCELLANEOUS TOOLS & EQUIPMENT

• REVISIONS •

FLOOD CONTROL PROJECT NO 21 PHASE B
PA. DEPT OF MINES & MINERALS INDUSTRIES

GLEN ALDEN CORPORATION
STANTON COLL. NO. 7 SHAFT

ROUSHEY AND SMITH
ENGINEERS AND CONSULTANTS
189 MARKET ST KINGSTON, PA.
METROPOLITAN WILKES BARRE

SCALE NOTED
DATE 1-30-59
BY KAE
JOB 641
DWG. No. 11