

DISTRICT	COUNTY	ROUTE	SEC.	SHEET
4-0	LUZERNE	4	20	5 of 7

Plymouth Borough

REQUIRED LIST


Sta. 1172+17 to Sta. 1261+61.30
Bituminous Surface Course JA-1
4365 Tons - Roadway
181 Tons - Depressions
39 Tons - Backfill for railhead area *
32 Tons - Adjustment to Street Intersections *
3 Tons - Adjustment at end of resurfacing *

8" Plain Cement Concrete Base Crse.
Special Mix - Item #19
1476 S.Y. - Base Replacement *
1464 S.Y. - Remove and replace disintegrated Pavement as directed.

Plain Cement Concrete Base Crse.
Special Mix (Variable Depth) - Item #19a
821 C.Y. - Replacement in trolley area *

111 L.F. Pl. Cem. Conc. Curb Type "A" *
13 Sets - Reset Manhole Castings *
16 Sets - Reset Inlet Castings *
3 Sets - Type "A" Manhole Castings *
1 Set - Type "C" Inlet Casting *
2 Ea. - Type 6" Special Inlets with Sumps *
1.0 Vert. Ft. - Rebuilt Inlet *

* As tabulated on Sheet #4

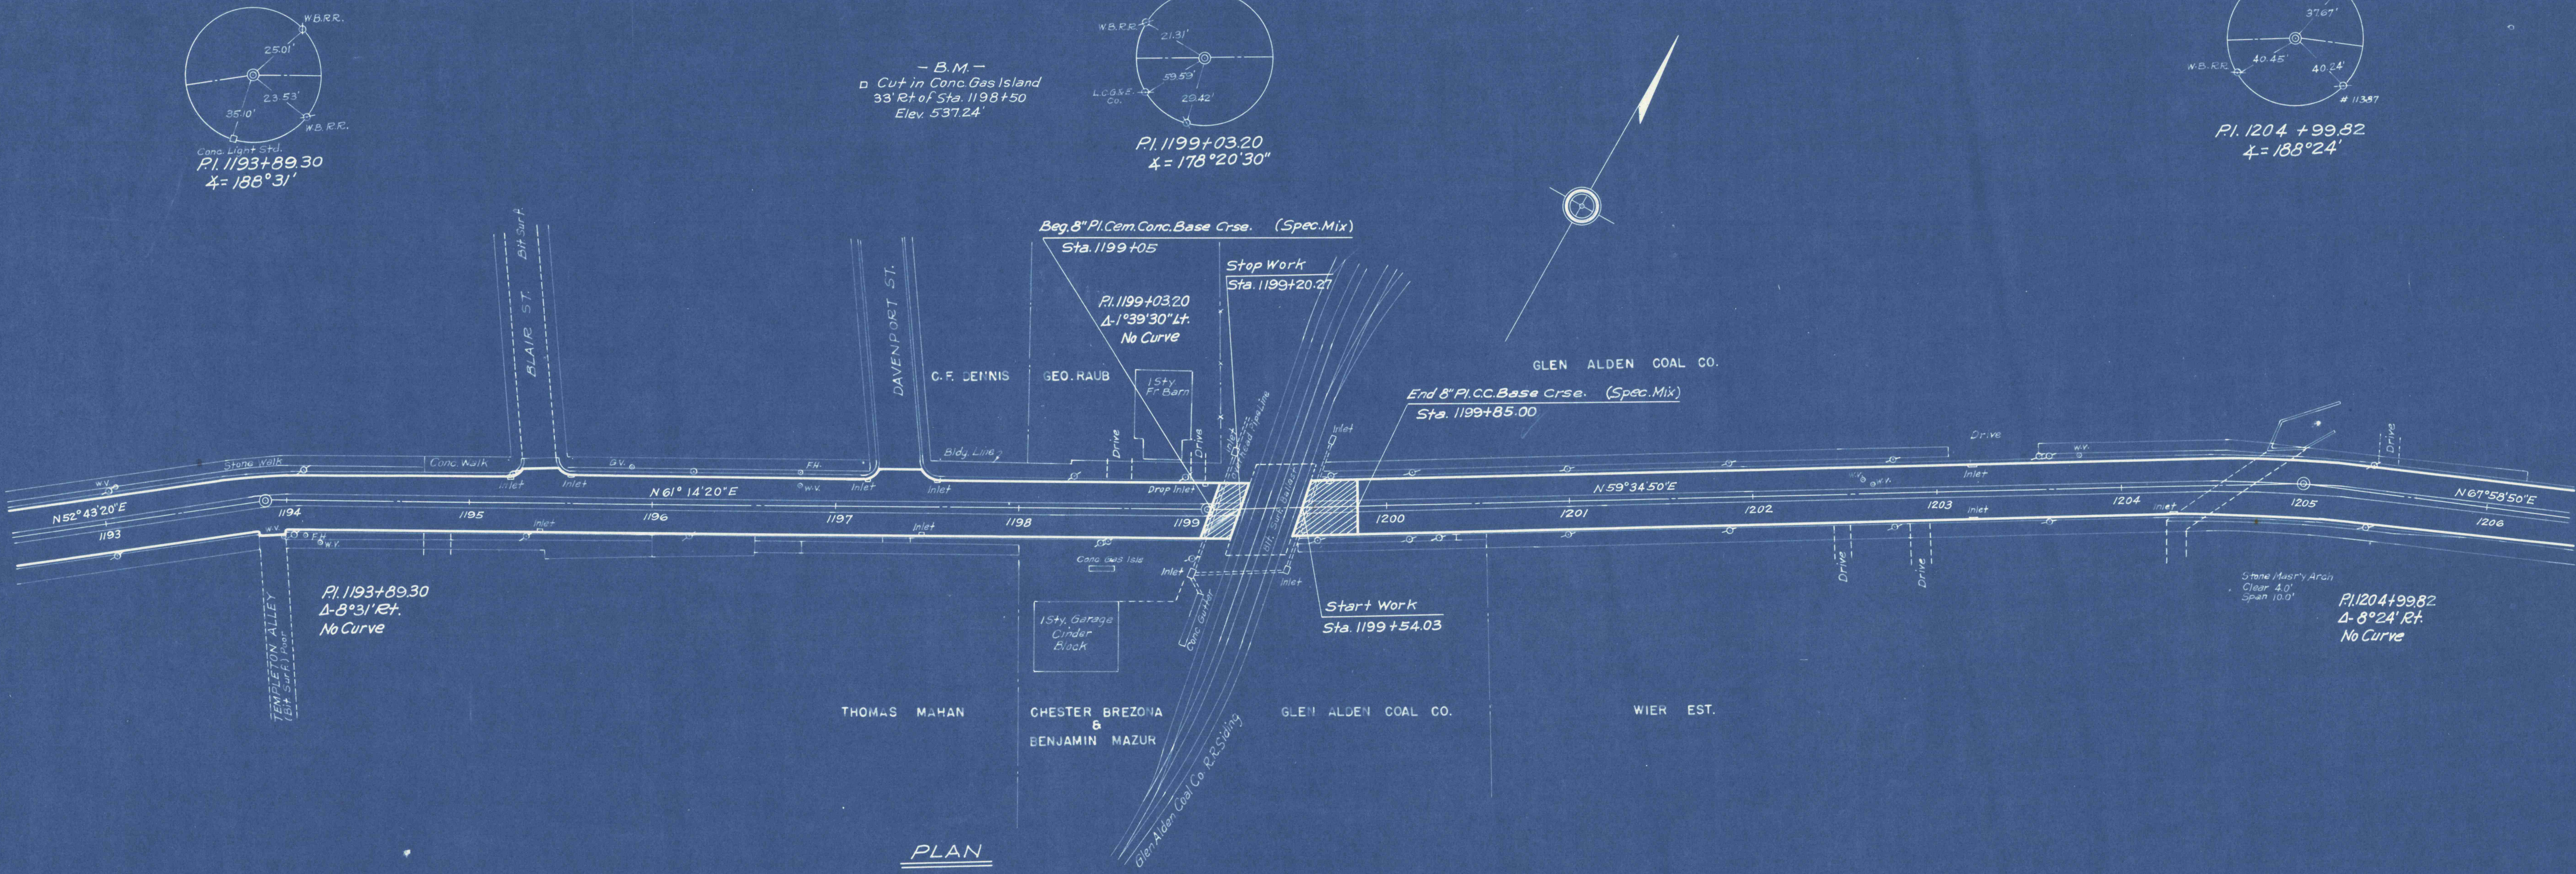

PLAN
Scale 1"=50'

DATUM=510

PROFILE
SCALE { Hor. - 1"=25'
VER. - 1"=5'

