




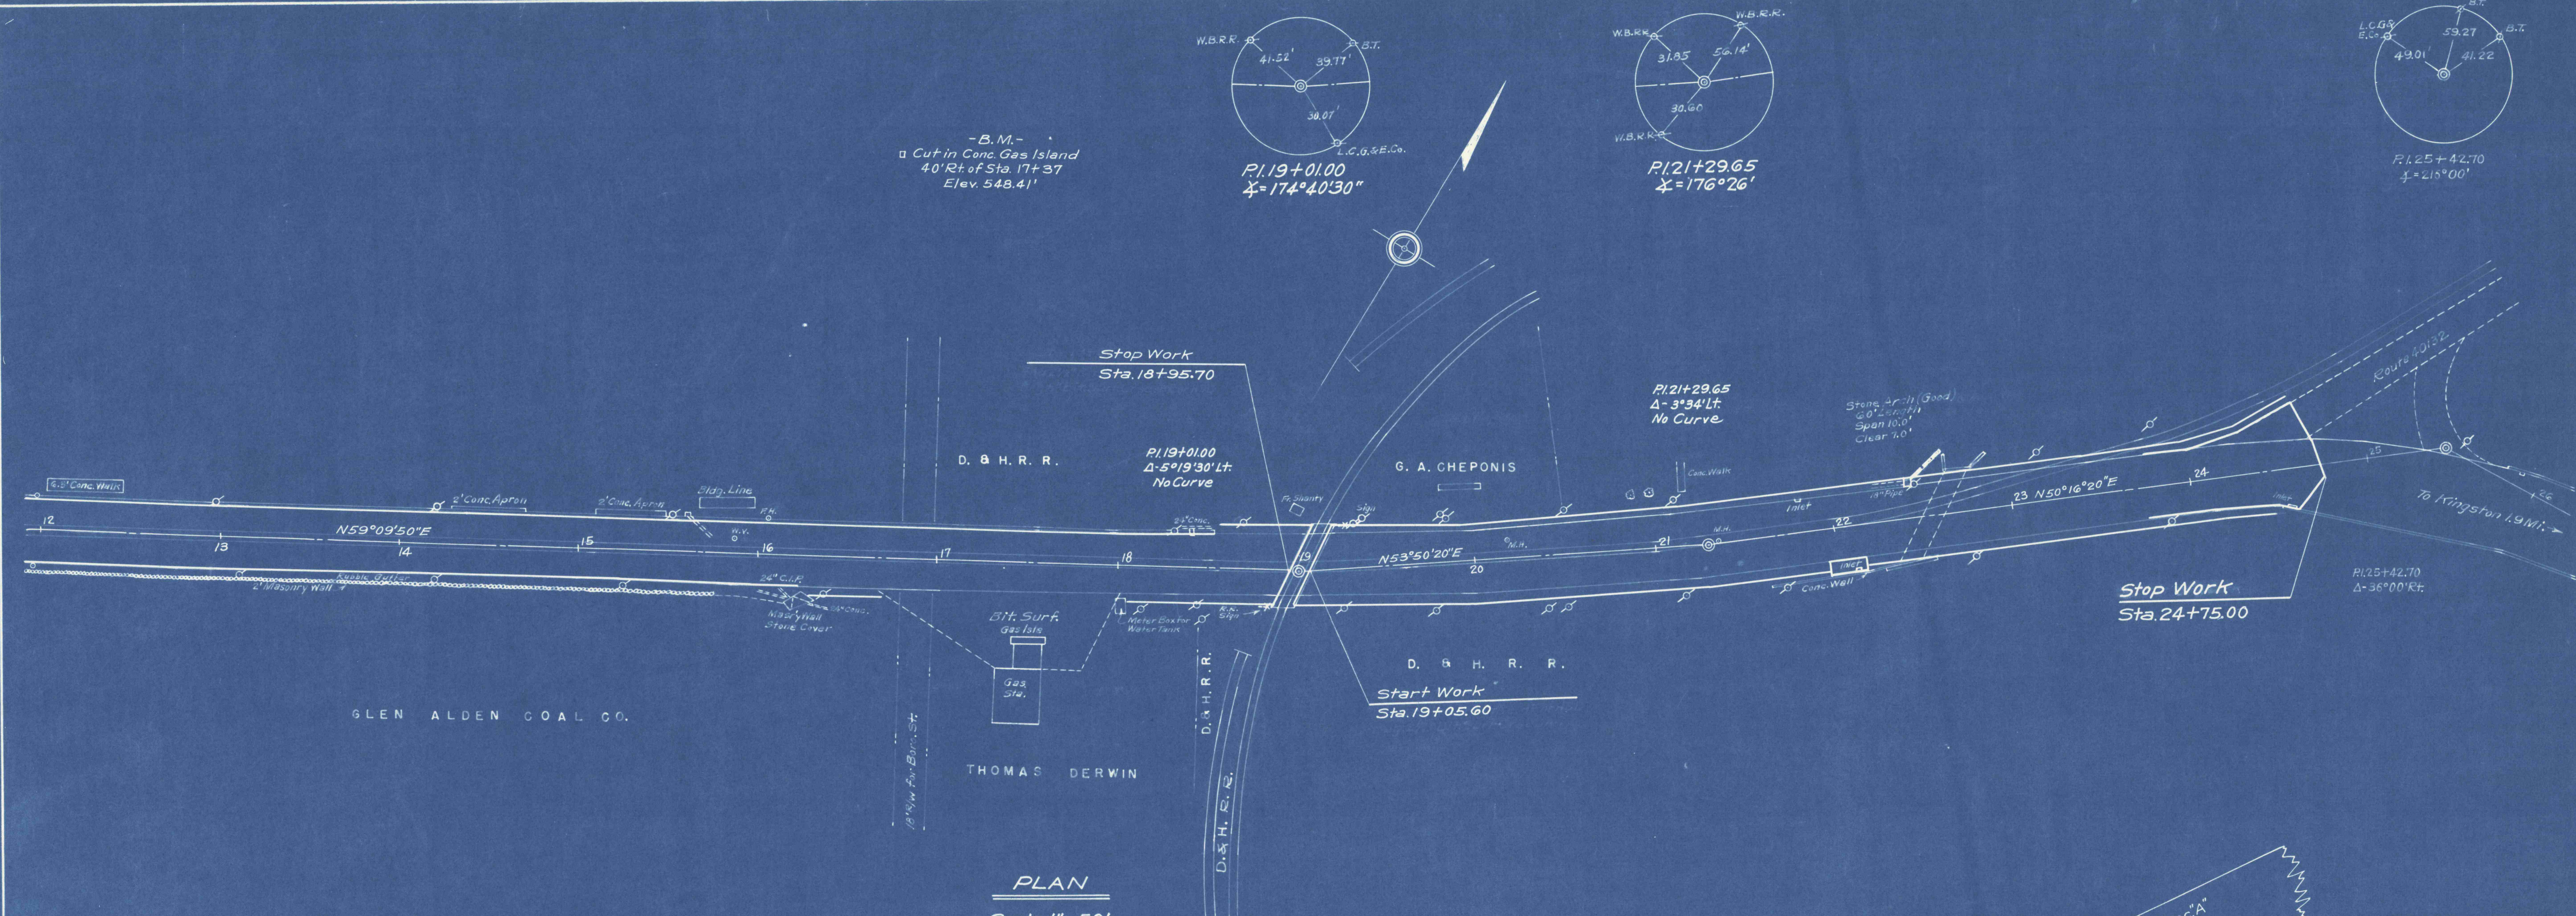

PLAN
Scale 1"=50'

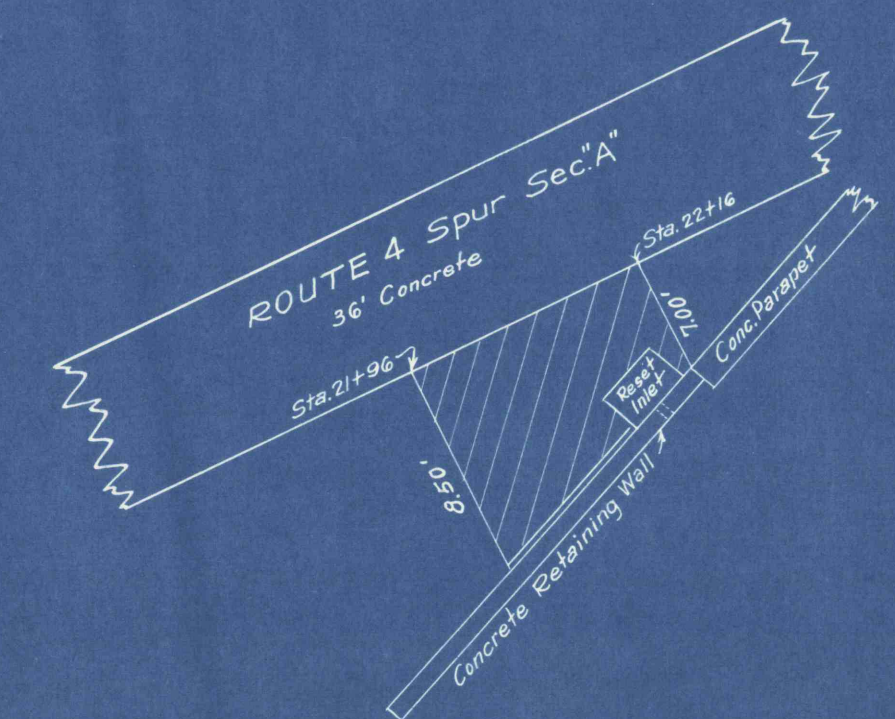

SKETCH SHOWING LOCATION OF PL. CEM. CONC. CURB GUTTER "A"

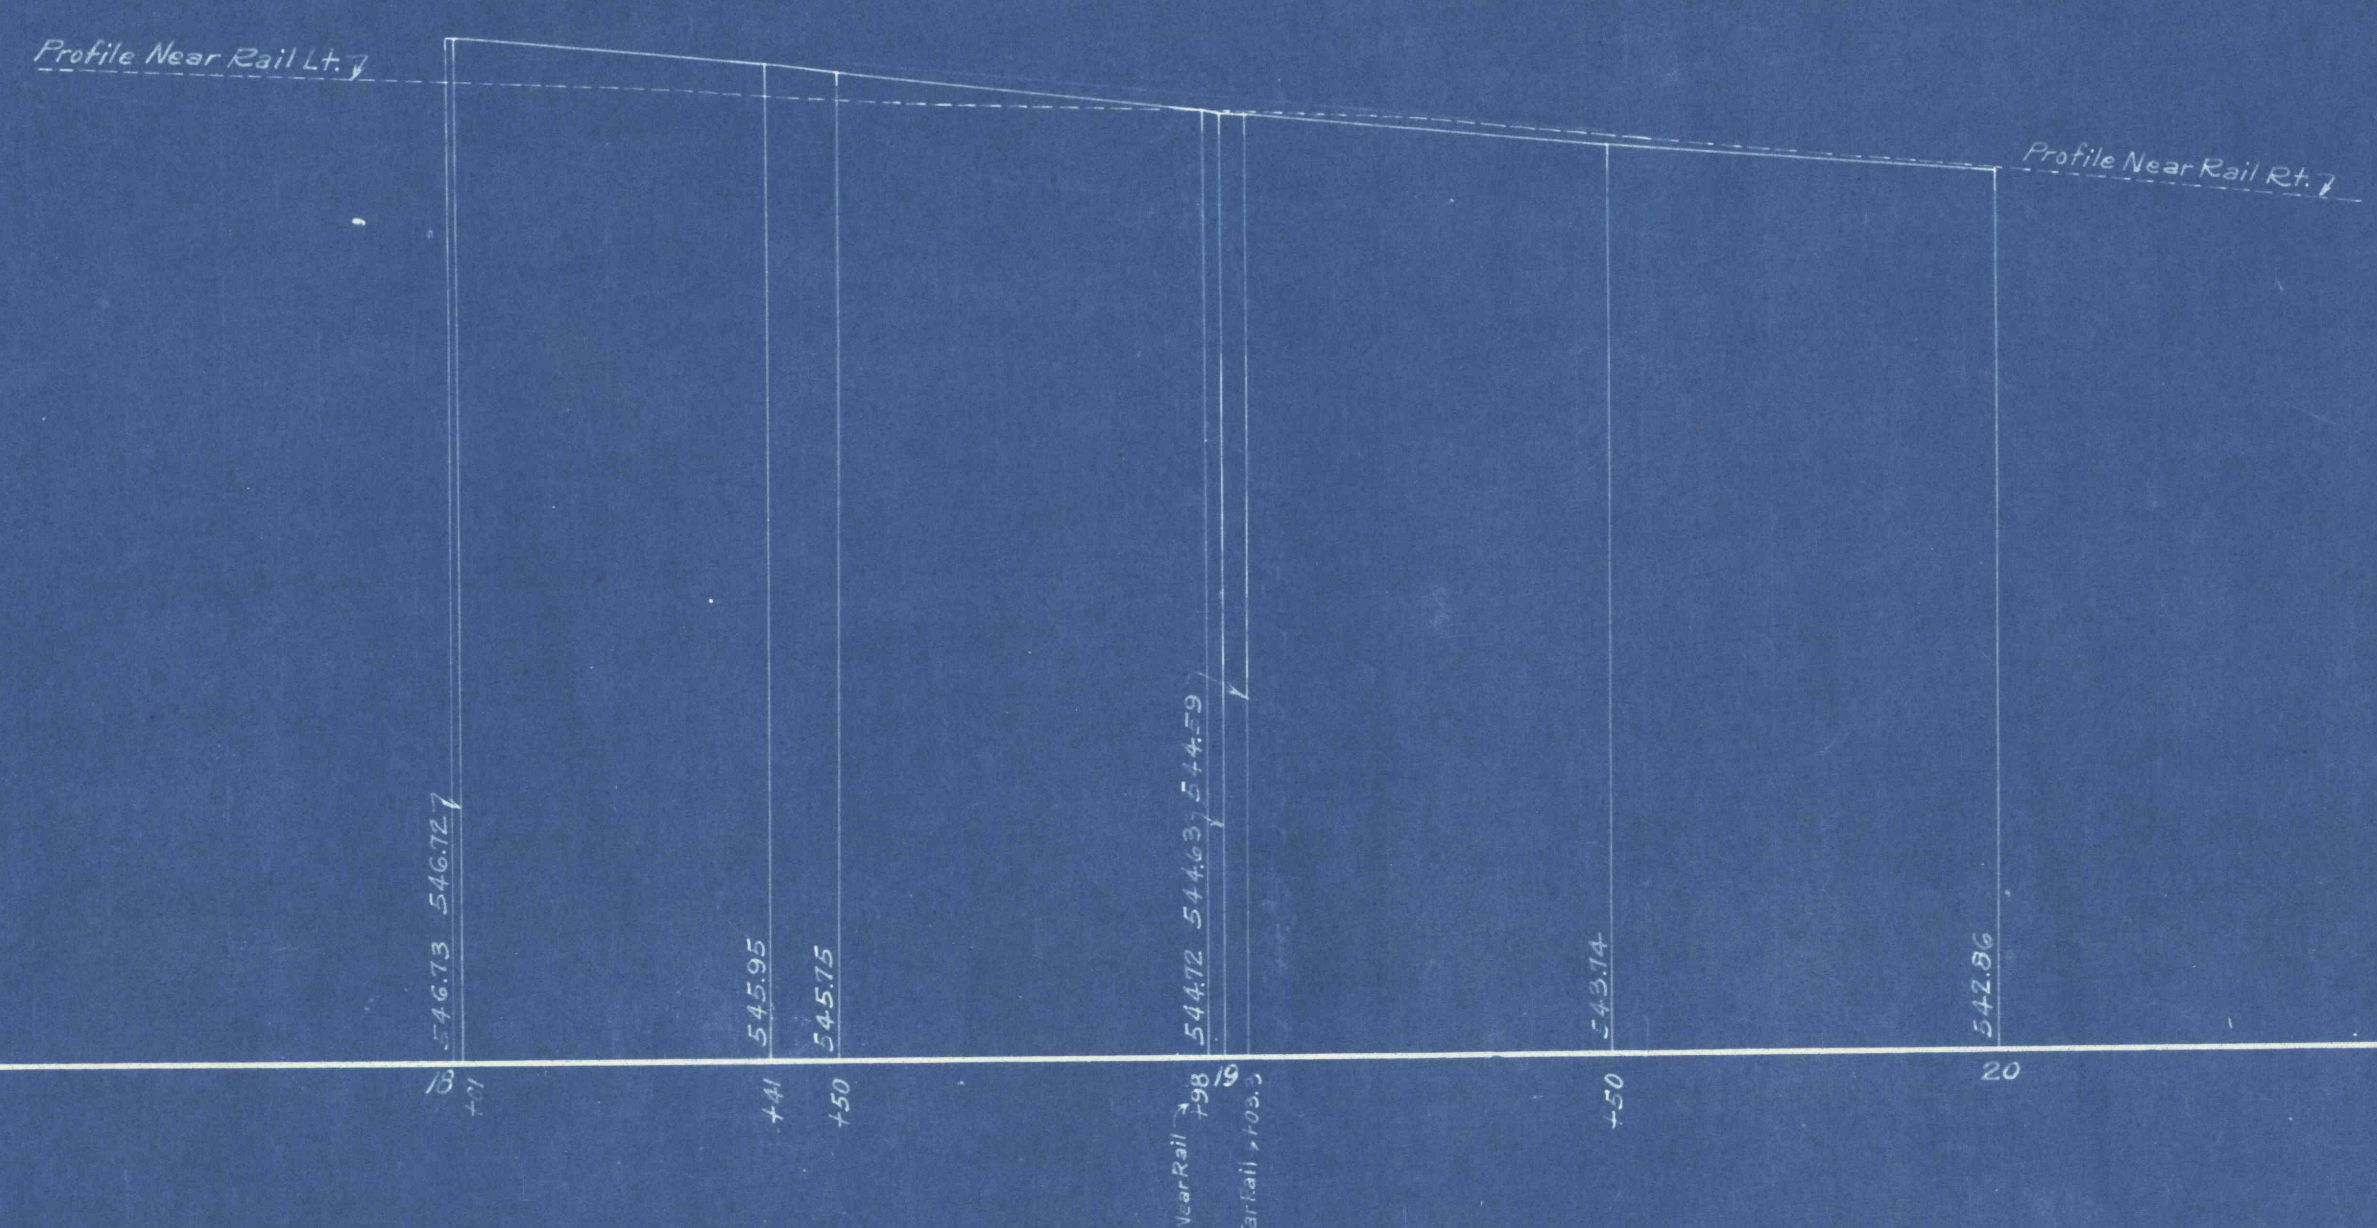

PROFILE
SCALE { Hor. 1"=25'
Ver. 1"=5'

DATUM=520

DISTRICT	COUNTY	ROUTE	SEC.	SHEET
4-0	LUZERNE	4Spur	A	6 of 7
Larksville Borough				
REQUIRED LIST				
Sta. 0+00 to Sta. 24+75				
Bituminous Surface Course JA-1				
1227 Tons-Roadway				
47 Tons-Depressions				
10 Tons-Adjust to Street Intersections*				
10 Tons-Adjust at end of resurfacing*				
8" Pl. Cem. Conc. Base Crse. (Special Mix)				
Item #19				
2269 S.Y.-Base replacement *				
230 S.Y.- (Remove and replace disinte- grated pavement as directed.)				
Pl. Cem. Conc. Base Crse. (Spec) Var. Depth				
Item #19a				
12 C.Y.-Replacement in trolley Area *				
1 Set Reset Manhole Castings *				
1 Set Reset Inlet Castings *				
1 Set-Type "A" Manhole Castings *				
1 Ea.-Type "E" Inlet *				
1 Ea.-Type "G" Special Inlet *				
20 Vert. ft.-Rebuilt Inlet *				
24 L.F. 15" R.C.C. Pipe *				
20 L.F. 18" C.M. Pipe *				
26 C.Y. C.I. "B" Concrete *				
56 lbs. Reinforcement Bars *				
17 C.Y. C.I. 2 Exc. (Pipe & Junction Boxes)				
1534 L.F. Pl. Cem. Conc. Curb Type "A" *				
* As Tabulated on Sheet #4				
Sta. 21+96 to Sta. 22+16 Lt.				
Fill Back of proposed curb with waste material from excavation as directed by Engineer.				
Sta. 21+96 to Sta. 22+16 Rt.				
18 S.Y. Pl. Cem. Conc. Curb Gutter "A" (See Sketch This Sheet)				
Sta. 22+ Lt.				
10 C.Y. Emb.- Fill Pocket Material to consist of Old Pavement from excavation.				
Sta. 22+ Lt.				
25 C.Y. Emb.- Fill Pocket Material to consist of Old Pavement from excavation.				
ENTIRE PROJECT				
Rte. 5 Spur Sec. 2 - Sta. 26+64.5 to Sta. 41+37				
Rte. 4 Sec. 20 - Sta. 1172+17 to Sta. 1362+25.21				
Rte. 4 Spur Sec. "A" Sta. 0+00 to Sta. 24+75				
200 Lin. ft.- 6" Fdn. Drain "B" Type II Backfill				
200 Lin. ft.- 6" Drain Outlets				
200 Lin. ft.- Subgrade Drains				
1 Ton - Calcium Chloride (for Dust Laying)				
To be placed as directed				
The department reserves the right to eliminate any or all of the above items of work.				