REQUIRED LIST								
NO.	NAME	MK.	NO. PCS.	DESCRIPTION	LGTH.	PC. MK.	REMARKS	WT.

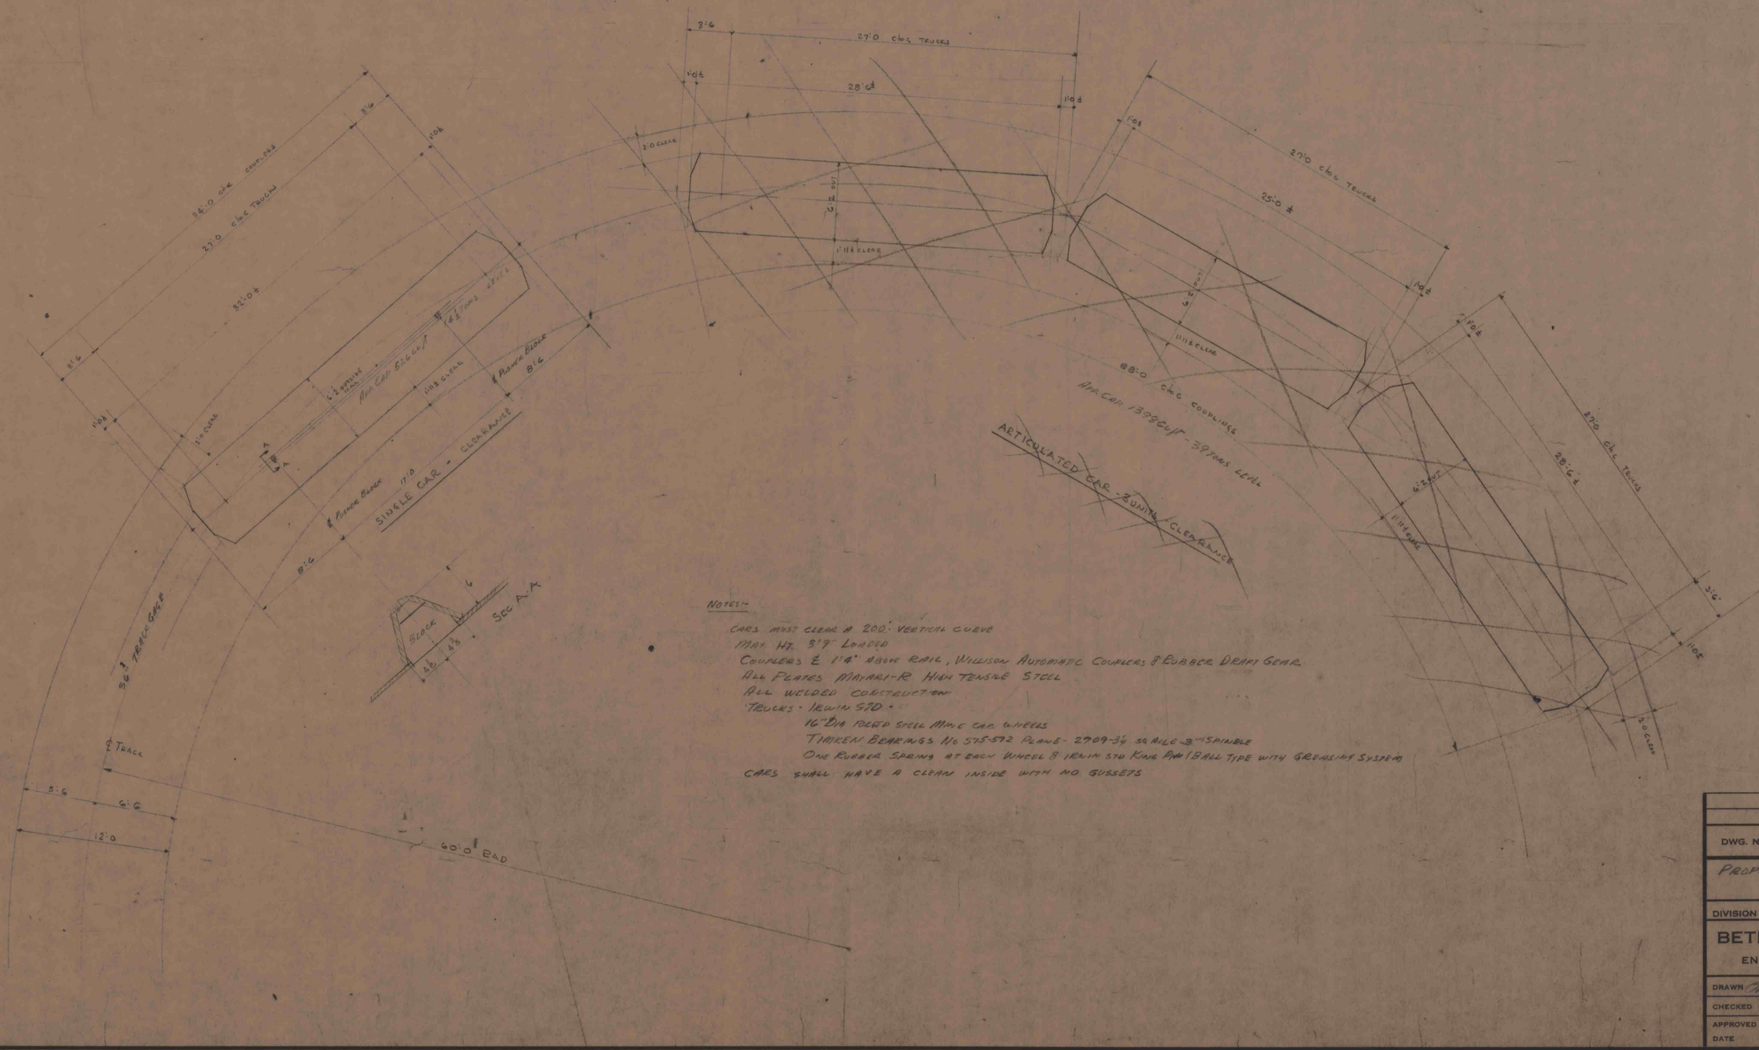

NOTES:-

CARS MUST CLEAR A 200' VERTICAL CURVE
MAX. HT. 3'9" LOADED
COUPLERS ℄ 1'4" ABOVE RAIL, WILLISON AUTOMATIC COUPLERS & RUBBER DRAFT GEAR
ALL PLATES MAYARI-R HIGH TENSILE STEEL
ALL WELDED CONSTRUCTION
TRUCKS - IRWIN STD.
16" DIA FORGED STEEL MINE CAR WHEELS
TIMKEN BEARINGS No 575-572 PLANE - 2909-3¼ SQ AXLE - 3" SPINDLE
ONE RUBBER SPRING AT EACH WHEEL & IRWIN STD KING PIN / BALL TYPE WITH GREASING SYSTEM
CARS SHALL HAVE A CLEAN INSIDE WITH NO GUSSETS

DWG. NO.	REFERENCE	NO.	DATE	BY
		I	8-12-62	SMc

REVISIONS

PROPOSED MINE CARS - CAMBRIA SLOPE

DIVISION CAMBRIA — MINE NO. 32

BETHLEHEM MINES CORPORATION
ENGINEERING DEPARTMENT – JOHNSTOWN, PA.

DRAWN Mc	DATE	ORDER NO.	
CHECKED	DATE	SCALE 1"=5'	
APPROVED		DWG. NO. 32E3-270	
DATE			