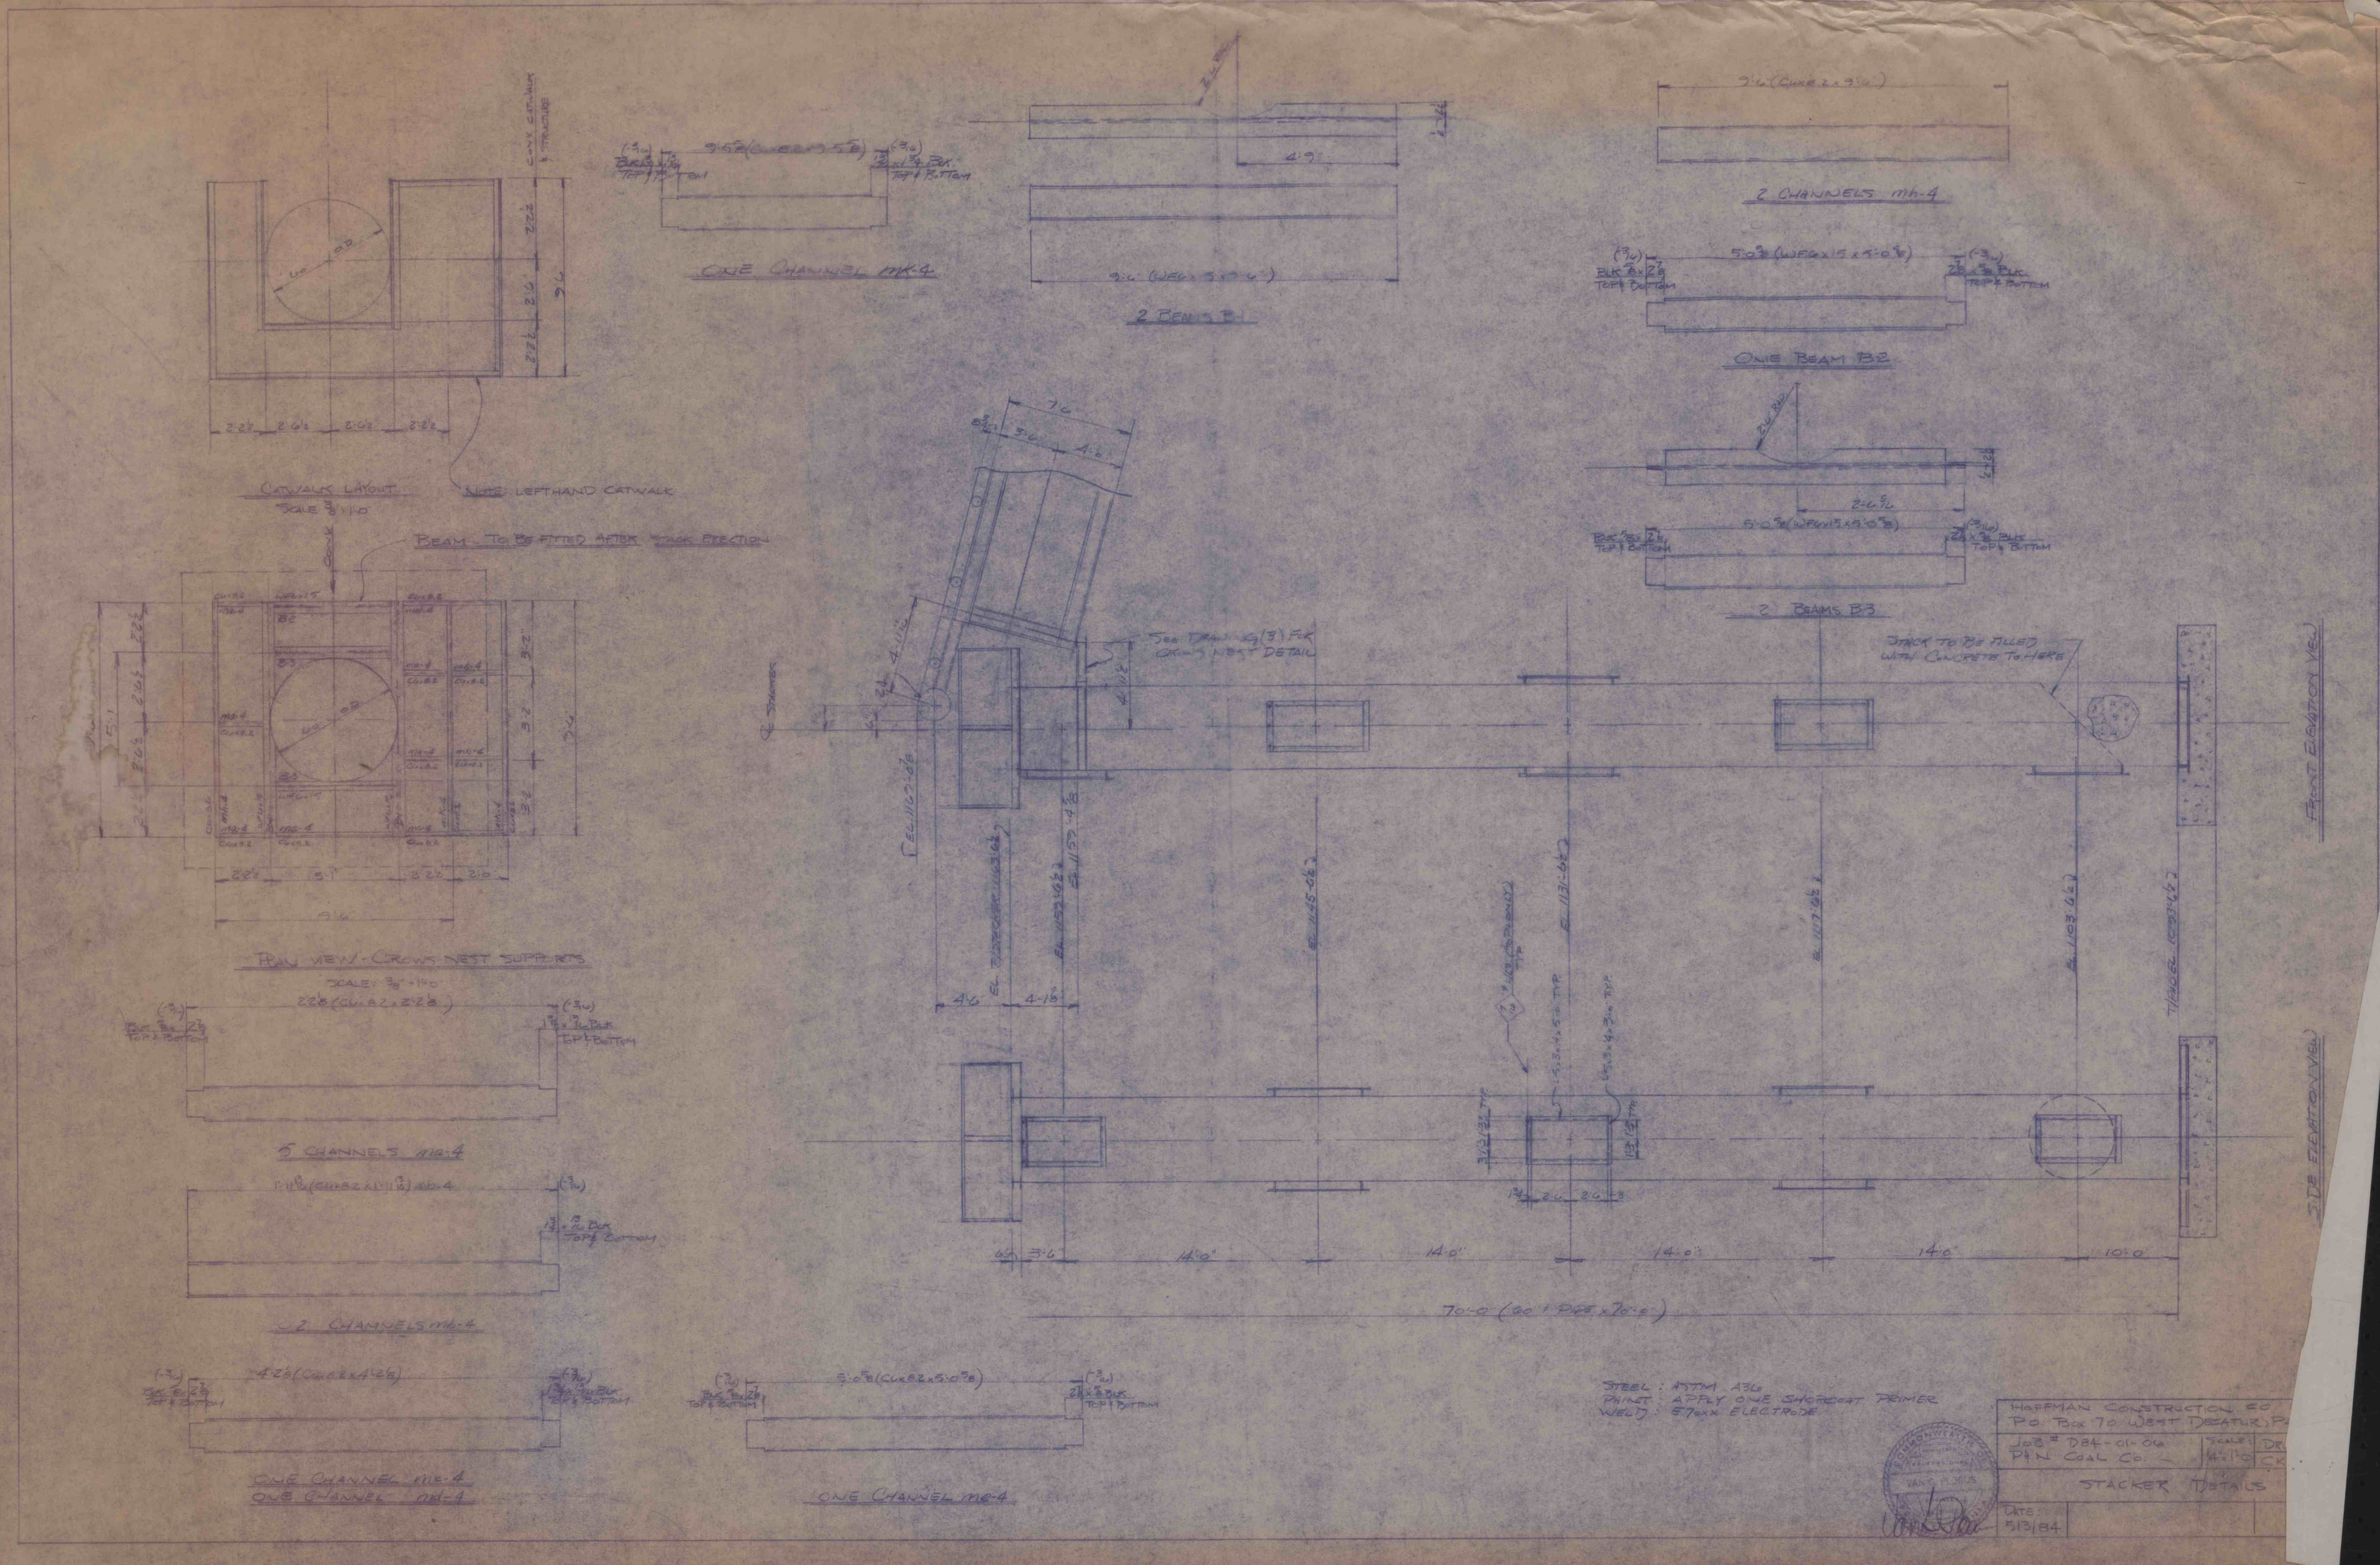
CATWALK LAYOUT
SCALE 3/8" = 1'-0"
NOTE: LEFTHAND CATWALK
CONV. CATWALK & STRUCTURE
BEAM - TO BE FITTED AFTER STACK ERECTION
CONV.
PLAN VIEW - CROWS NEST SUPPORTS
SCALE: 3/8" = 1'-0"
ONE CHANNEL MK-4
2 BEAMS B-1
9'-6" (WF6 x 15 x 9'-6")
2 CHANNELS MK-4
9'-6" (C6 x 8.2 x 9'-6")
ONE BEAM B2
5'-0 5/8" (WF6 x 15 x 5'-0 5/8")
2 BEAMS B-3
5 CHANNELS MB-4
2'-2 1/8" (C6 x 8.2 x 2'-2 1/8")
2 CHANNELS MB-4
ONE CHANNEL MC-4
ONE CHANNEL MD-4
4'-2 1/8" (C6 x 8.2 x 4'-2 1/8")
ONE CHANNEL ME-4
5'-0 5/8" (C6 x 8.2 x 5'-0 5/8")
BLK 5/8 x 2 7/8 TOP & BOTTOM
See Drawing (3) For Crows Nest Detail
STACK TO BE FILLED WITH CONCRETE TO HERE
℄ STACKER
EL. 1163'-6 1/2"
EL. 1159'-4 3/8"
EL. 1145'-6 1/2"
EL. 1131'-6 1/2"
EL. 1117'-6 1/2"
EL. 1103'-6 1/2"
T/PIER EL 1093'-6 1/2"
14'-0"
10'-0"
70'-0" (60" PIPE x 70'-0")
FRONT ELEVATION VIEW
SIDE ELEVATION VIEW
STEEL: ASTM A36
PAINT: APPLY ONE SHOPCOAT PRIMER
WELD: E70XX ELECTRODE
HOFFMAN CONSTRUCTION CO
PO BOX 70 WEST DECATUR, P...
JOB # D84-01-06
P&N COAL CO.
SCALE: 1/4" = 1'-0"
STACKER DETAILS
DATE: 5/3/84
COMMONWEALTH OF PENNSYLVANIA
VAN C. PLOGUS