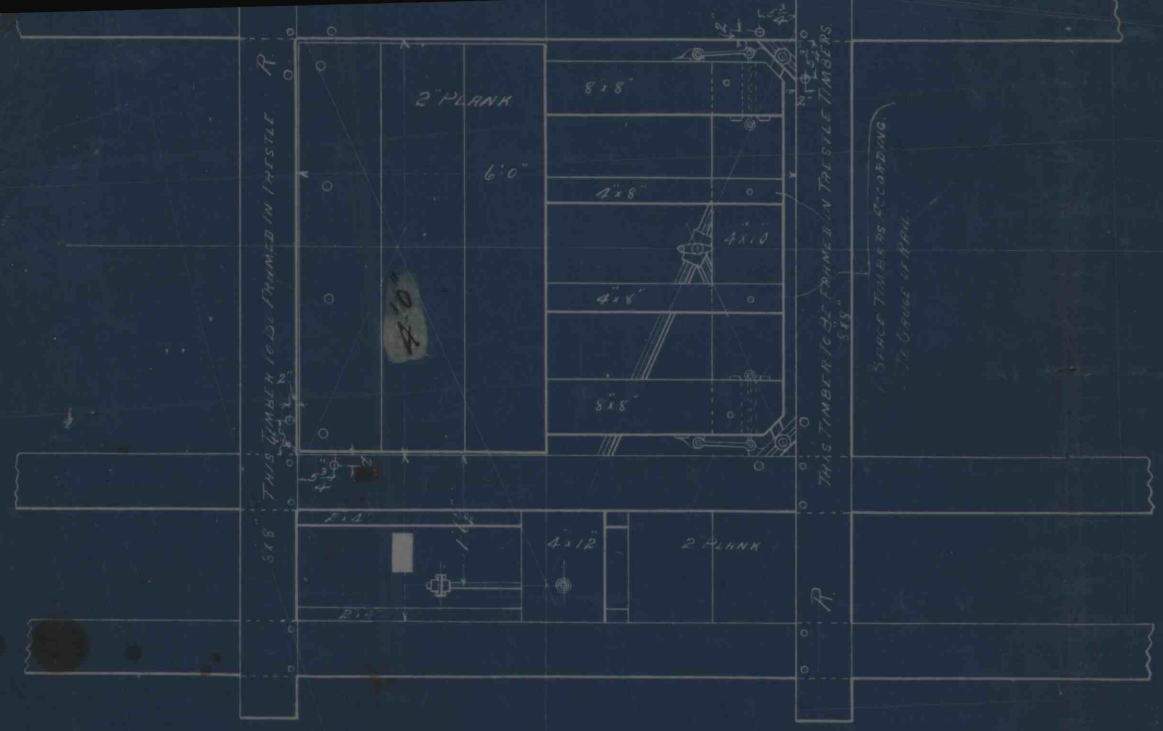

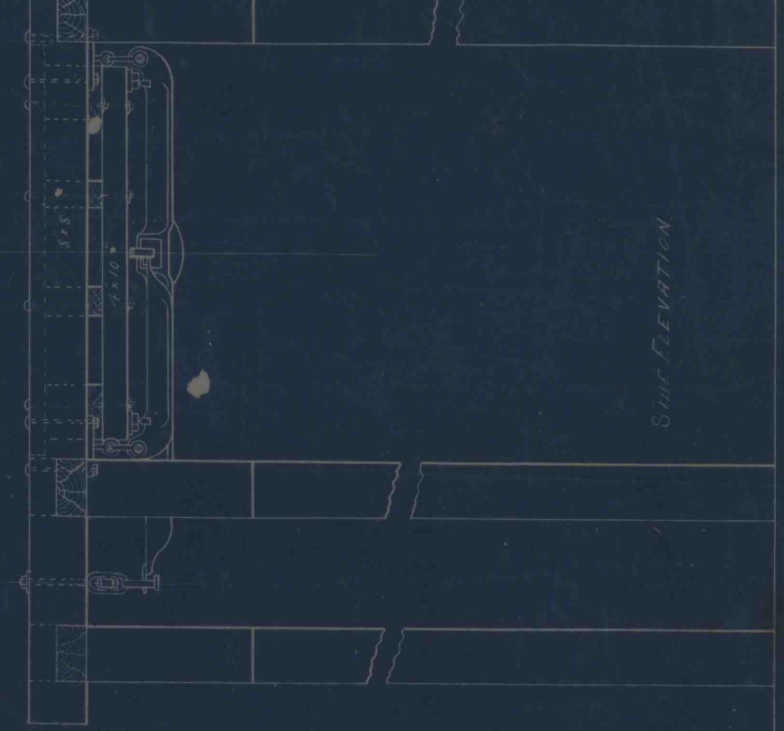

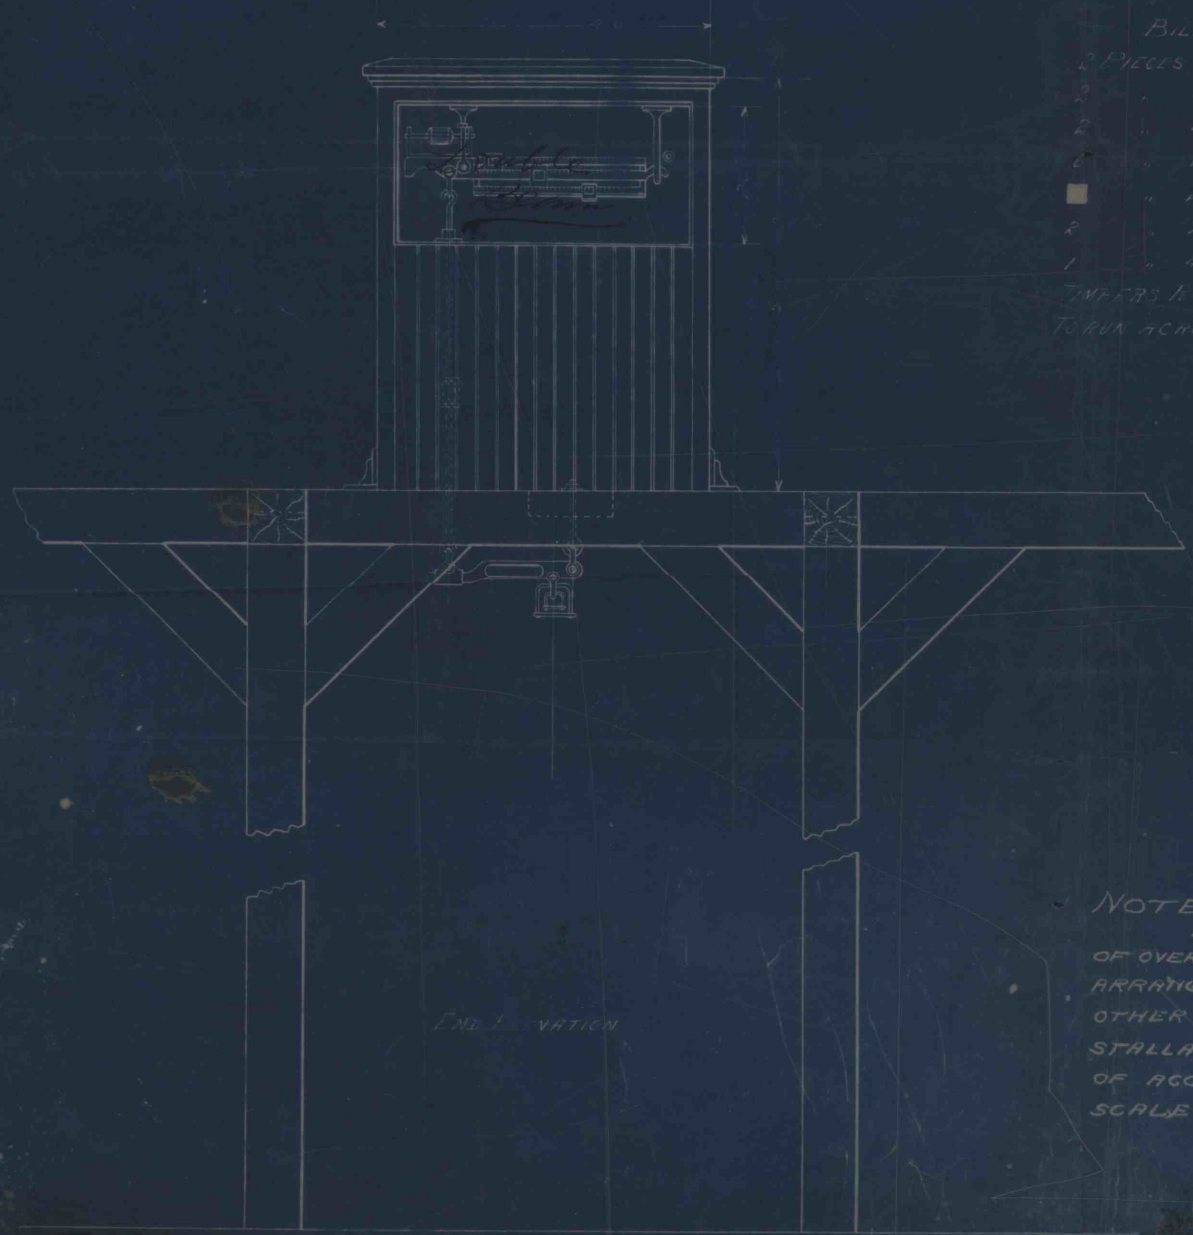

BILL OF TIMBER

2 PIECES 8x8x6'0" LONG HARD PINE.
2 " 4x8x6'0" " " "
2 " 4x10x40" " " "
6 " 2x12x40" " " "
" 2x12x12'0 " " "
2 " 2x4x6'0 " " "
1 " 4x12x [redacted]
TIMBERS R.R. TO BE OF SUFFICIENT LENGTH TO RUN ACROSS TRESTLE TIMBERS

BILL OF LUMBER

2 PIECES 2x9x12'0" LONG EAST PINE
1 " 1x6'0" " " "
60 FT. MATCHED CEILING PLANED BOTH SIDES

4 TON MINER SCALE PLATFORM 6x4 FT
TO BE BUILT ON TRESTLE

MANUFACTURED BY
BUFFALO SCALE CO. BUFFALO, N.Y.

SCALE 2" = 1 FOOT

JULY 1906

NOTE —
IT IS UNDERSTOOD THAT PURCHASERS OF OVERHEAD BUFFALO SCALES WILL ARRANGE FOR SAFETY CHAINS, RODS OR OTHER DEVISE AS WILL PREVENT INSTALLATIONS FROM FALLING IN EVENT OF ACCIDENT OR DISARRANGEMENT OF SCALE MECHANISM.

No 298

IMAPS# 18220